



MIN SERIES

Mineral Water Filtration System

MF MINERAL SERIES WATER FILTRATION SYSTEM

Makfilter MIN Series filter is specially designed for enriching water with low pH and/or low mineral content.

While the special minerals in the MF Min series enrich the water, there is a noticeable positive effect on the flavors of tea and coffee, while the problems caused by wear in your equipment are greatly reduced.

It can be used easily with its compact structure for tea, coffee, drinking purposes and to eliminate water overflow problems in equipment.




FEATURES

- Capsule design filter housing
- Quick and sanitary filter change
- Check valve system to prevent reverse water flow
- Ability to use different filtration models with a single valve
- Horizontal or vertical workability
- NSF compliant, food grade ingredients
- Easy installation and removal with NSF certified QC fastening systems

OPTIONS

- Additional filtration requirement requested by the manifold system can be easily used in a single body.
- High flow requirements can be met with the manifold system.

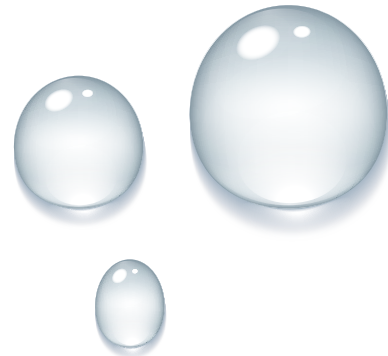

www.makfilter.com.tr





TECHNICAL DETAILS



MF MIN 10 Mg		MF MIN 10 Ca
Characteristics		
Nominal Flow	240 lt / hour	240 lt / hour
Filtration Efficiency	10 Micron	10 Micron
Capacity @10ppm	8.000 lt	8.000 lt
Taste and Odor Reduction	No	No
Operational Condition		
Inlet Water Flow	1,5 – 7,0 Bar	1,5 – 7,0 Bar
Inlet Water Temperature	5 – 32 °C	5 – 32 °C
Ambient Temperature	5 – 38 °C	5 – 38 °C
Water Line Connection		
In - Out	3/8 QC"	3/8 QC"
Dimension & Weight		
Height x Width x Dept	3,87 x 8,5 cm	38,7 x 8,5 cm
Weight	1550 gr	1550 gr
Order Code		
Filter Code	CD10010231104	CD10010231106
Valf Code	SP10010191101	SP10010191101

WARNINGS & RECOMMENDATIONS

Use a pressure regulating system at the filter inlet where the pressure is above 5 bar.

Avoid using in waters that are not microbiologically safe and do not have sufficient disinfection protection. (except city mains sources)

Install indoors, away from heat or cold air sources.

Install in places that are easy to reach. Install at least 6 cm from above the floor.

Be sure to put a water shut-off valve before the filter.

The filter can be used for a maximum of 12 months after installation. If the change is not made on time, there may be a problem with the filtering quality. At the same time, leakage and water overflow problems may occur.

