



AC SERIES

Taste Odor Color Filtration System

MF AC SERIES TASTE ODOR COLOR FILTERING SYSTEM

Makfilter AC Series filter, with its capsule design, provides practical installation and intervention opportunity for restaurants, cafes and hotels, taking up little space.

It is specially designed to eliminate odor and color problems. With its special content, it provides benefits for equipment health and product taste with its high capacity odor and color removal, as well as turbidity, sediment, rust and shaft removal.

It is suitable for ice production, carbonated and non-carbonated cold drinks and drinking purposes.




FEATURES

- Capsule design filter housing
- Quick and sanitary filter change
- Check valve system to prevent reverse water flow
- Ability to use different filtration models with a single valve
- Horizontal or vertical workability
- NSF compliant, food grade ingredients
- Easy installation and removal with NSF certified QC fastening systems

OPTIONS

- Additional filtration requirement requested by the manifold system can be easily used in a single body.
- High flow requirements can be met with the manifold system.

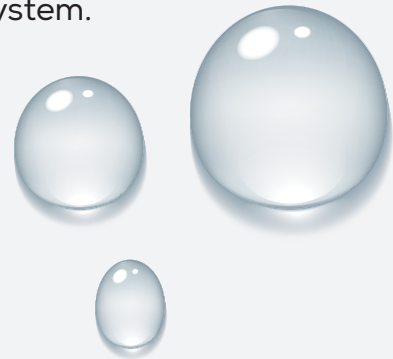



TECHNICAL DETAILS



	MF AC 10B	MF AC 10G
Characteristics		
Nominal Flow	400 lt / hour	240 lt / hour
Filtration Efficiency	30 Micron	10 Micron
Capacity	20.000 lt	50.000 lt
Taste and Odor Reduction	Yes	Yes
Operational Condition		
Inlet Water Flow	1,5 - 7,0 Bar	1,5 - 7,0 Bar
Inlet Water Temperature	5 - 32 °C	5 - 32 °C
Ambient Temperature	5 - 38 °C	5 - 38 °C
Water Line Connection		
In - Out	3/8 QC"	3/8 QC"
Dimension & Weight		
Height x Width x Dept	38,7 x 10,5 cm	38,7 x 10,5 cm
Weight	980 gr	1150 gr
Order Code		
Filter Code	AC10010191101	AC10010221101
Valf Code	SP10010191101	SP10010191101

WARNINGS & RECOMMENDATIONS

Use a pressure regulating system at the filter inlet where the pressure is above 5 bar.

Avoid using in waters that are not microbiologically safe and do not have sufficient disinfection protection. (except city mains sources)

Install indoors, away from heat or cold air sources.

Install in places that are easy to reach. Install at least 6 cm from above the floor.

Be sure to put a water shut-off valve before the filter.

The filter can be used for a maximum of 12 months after installation. If the change is not made on time, there may be a problem with the filtering quality. At the same time, leakage and water overflow problems may occur.

